




Industrial gas counter SDX500

FB400Series

SDX500

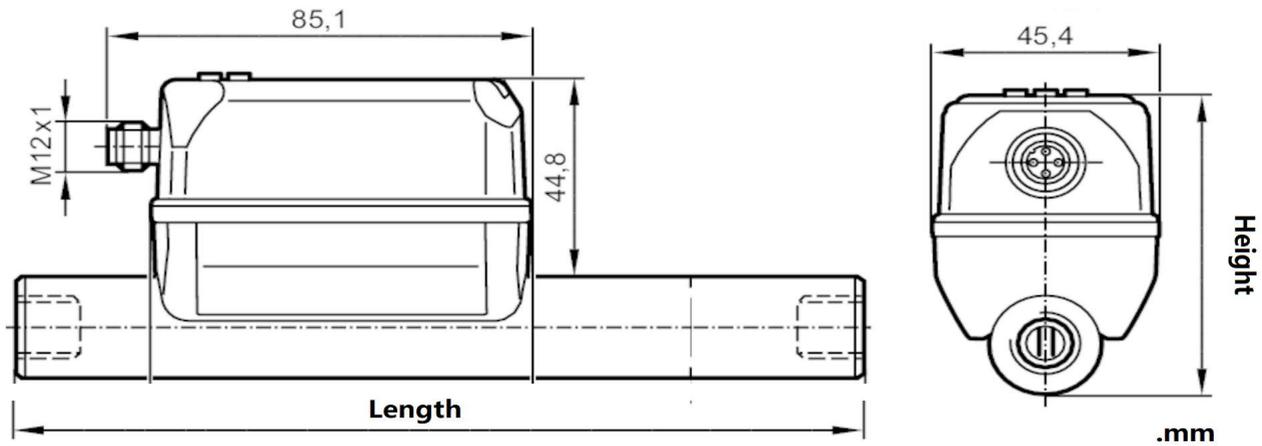

Type	Range	Process connection	Length	Height
FB400-SD5500	0...15m ³ /h	G1/4F-DN8	182	67.8
FB400-SD6500	0...75m ³ /h	R1/2M-DN15	300	71.2
FB400-SD8500	0...225m ³ /h	R1M-DN25	475	83.1
FB400-SD9500	0...410m ³ /h	R1 1/4M -DN40	475	97.7
FB400-SD2500	0...700m ³ /h	R2M-DN50	475	109.7



Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1	
Measuring range	See the table above	
Process connection	See the table above	

Application

Application	for industrial applications	
Media	Carbon dioxide (CO ₂); nitrogen (N ₂); compressed air	
Medium temperature [°C]	-10...60	
Min. bursting pressure	64 bar	6.4 MPa
Pressure rating	16 bar	1.6 MPa
MAWP (for applications according to CRN) [bar]	9.5	

Electrical data

Operating voltage [V]	18...30 DC; (to SELV/PELV)	
Current consumption [mA]	< 80	
Protection class	III	
Reverse polarity protection	yes	
Power-on delay time [s]	1	

FB400Series

SDX500

Inputs / outputs		
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1	
Inputs		
Inputs	counter reset	
Outputs		
Output signal	switching signal; analog signal; pulse signal;	
Electrical design	PNP/NPN	
Number of digital outputs	2	
Output function	normally open / closed; (configurable)	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	150; (per output)	
Number of analog outputs	1	
Analog current output [mA]	4...20; (scalable)	
Max. load [Ω]	500	
Pulse output	consumed quantity meter	
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
Pressure monitoring		
Measuring range [bar]	-1...16	
Display range [bar]	-1...20	
Resolution [bar]	0.05	
Set point SP [bar]	-0.92...16	
Reset point rP [bar]	-1...15.92	
Analog start point [bar]	-1...12.8	
Analog end point [bar]	2.2...16	
In steps of [bar]	0.01	
Volumetric flow quantity monitoring		
Measuring range	0...100000000 m ³	0...353146667.2 scf
Display range	0...100000000 m ³	0...353146667.2 scf
Set point SP	0.001...10000000 m ³	0.05...353146667.2 scf
Pulse value	0.001...10000000 m ³	0.05...353146667.2 scf
In steps of	0.0001 m ³	0.005 scf

FB400Series

SDX500

Temperature monitoring		
Measuring range	-10...60 °C	14...140 °F
Display range	-24...74 °C	-11.2...165.2 °F
Resolution	0.2 °C	0.5 °F
Set point SP	-9.7...60 °C	14.6...140 °F
Reset point rP	-10...59.7 °C	14...139.4 °F
Analog start point	-10...46 °C	14...114.8 °F
Analog end point	4...60 °C	39.2...140 °F
In steps of	0.1 °C	0.1 °F
Accuracy / deviations		
Temperature coefficient [1/K]	± 0,07 % MW	
Accuracy (in the measuring range)	± (6 % MW + 0,6 % MEW); at medium temperature 23 °C	
Repeatability	± (0,4 % MW + 0,1 % MEW)	
Pressure monitoring		
Repeatability [% of the final value]	± 0,2	
Characteristics deviation [% of the final value]	< ± 0,5; (BFSL = Best Fit Straight Line)	
Greatest TEMPCO of the span [% MEW / 10 K]	± 0,3	
Greatest TEMPCO of the zero point [% MEW / 10 K]	± 0,1	
Temperature monitoring		
Accuracy [K]	± 0,5; (medium flow in the limit area of the flow measurement range)	
Reaction times		
Response time [s]	0.1; (dAP = 0)	
Damping process value dAP [s]	0...5	
Pressure monitoring		
Response time [s]	0.05	
Temperature monitoring		
Dynamic response T05 / T09 [s]	T09 = 0,5	
Software / programming		
Parameter setting options	hysteresis / window; normally open / closed; current/pulse output; display can be rotated and switched off; Display unit; totalizer	
Interfaces		
Communication interface		
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
Profiles	Digital Measuring Sensor (0x800A), Identification and Diagnosis (0x4000)	
SIO mode	yes	
Required master port class	A	

FB400Series

SDX500

Process data binary		2
Min. process cycle time	[ms]	7.2
Supported DeviceIDs	Type of operation	DeviceID
	default	861

Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-20...85
Max. relative air humidity	[%]	90
Protection		IP 65; IP 67

Tests / approvals		
EMC	DIN EN 60947-5-9	
CPA approval	model number	003TG
	accuracy class	-
	maximum allowable error	± 7 % FS
	Q (min)	0,05 m³/h (Air)
	Q (t)	-
	Q (max)	15 m³/h (Air)
Vibration resistance	DIN EN 68000-2-6	
MTTF	[years]	183
UL approval	UL approval number	I012
	File number UL	E174189
Pressure equipment directive	sound engineering practice; can be used for stable gases fluid group 2	

Mechanical data		
Weight	[g]	558
Housing		rectangular
Dimensions	[mm]	182 x 45.4 x 67.8
Material		PBT+PC-GF30; PPS GF40; stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); steel (1.5523) galvanized; 2.0401 (brass / CW614N); FKM
Materials (wetted parts)		EN AW-6082 (aluminium); stainless steel (1.4305 / 303); FKM; ceramics glass passivated; PPS GF40; Al2O3 (ceramics); acrylate
Process connection		See the table above

Displays / operating elements		
Display		Color display 1,44", 128 x 128 pixels
		2 x LED, yellow

Remarks		
Remarks		MW = Measured value
		MEW = Final value of the measuring range
		Standard conditions: 1013.25 mbar / 15 °C / 0 % relative humidity
		For information about installation and operation please see the operating instructions.
Pack quantity		1 pcs.

FB400Series


SDX500

Electrical connection

Connector: 1 x M12; coding: A



Connection

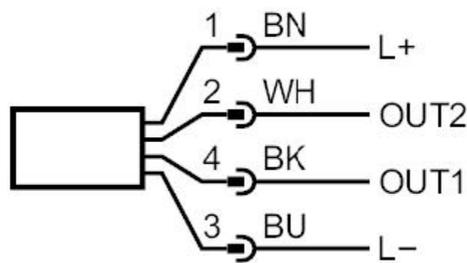

OUT1	Switching output flow Switching output temperature Switching output pressure Pulse output quantity meter signal output Preset counter
OUT2/InD:	Switching output flow Switching output temperature Switching output pressure analog output flow analog output temperature analog output pressure signal output Preset counter Pulse output quantity meter Input counter reset

FTI can accept no responsibility for possible errors in catalogues, brochures and other printed material. FTI reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed.